








### Feel the essence of the ride.

With a mighty 74 hp engine, the 701 Supermoto is the most powerful single-cylinder production supermoto on the market. A high performance street motorcycle that focuses on agility, manoeuvrability and maximum power-to-weight to deliver a truly dynamic street riding experience. Built with state-of-the-art components, innovative electronics and manufactured to the highest standards, this lively machine offers a thrilling mix of everything you need to hit your favourite stretch of road with ultimate confidence.

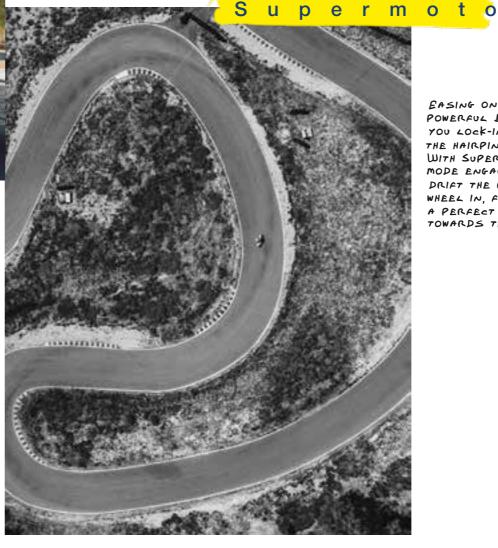

EASING ON THE POWERFUL BREMBOS, YOU LOCK-IN ON THE HAIRPIN AHEAD. WITH SUPERMOTO RIDE MODE ENGAGED YOU DRIFT THE REAR WHEEL IN, FORMING A PERFECT ARC TOWARDS THE APEX.

# Versatility without compromise.

From urban streets to off-the-beaten-track, the versatile Husqvarna 701 Enduro is designed to open up new riding possibilities. With its potent single-cylinder engine, state-of-the-art chassis and renowned offroad ability, this machine really is the master of all terrain. Slender ergonomics and high end WP XPLOR suspension deliver outstanding levels of agility and handling. The torquey 692.7 cc engine features surface-specific ride modes, as well as a ride-by-wire throttle, allowing riders of all levels to confidently take on their favourite offroad trail or daily commute with ease.

\*\*LEAN ANGLE TRACTION CONTROL\*\*

74 hp 146 kg 21"/18" wheels



READY TO GO WHERE IMPULSE TAKES YOU,
THE HUSQUARNA TOI ENDURO IS BUILT
TO DELIVER UNCOMPROMISED PERFORMANCE
ON, AND OFFROAD.










# Keep the ride going.

Bred from the Husqvarna 701 Enduro, the 701 Enduro LR offers the same dynamic all-terrain riding experience with extra long-range touring capability. With the addition of a front auxiliary tank, the fuel capacity of this nimble offroad machine is almost doubled to 25 litres. Made from high strength polyamide, the perfectly integrated impact resistant front tank allows up to 500 km of riding bliss. Its 43.4 kg engine is not only lightweight, but also extremely efficient and reliable, allowing for long 10,000 km service intervals and low fuel consumption. A state-of-the-art cornering ABS system, Brembo brakes and various electronic rider aids make this versatile touring machine a complete package.



### Single cylinder. Multiple skills.

The lightweight, 74 hp single-cylinder 692.7 cc engine features a ride-by-wire throttle for a perfectly linear power delivery. It offers refined performance for riders of all levels and advanced efficiency on the daily commute. The compactly designed single overhead camshaft cylinder head features two 42 mm intake valves and two 34 mm exhaust valves actuated by a robust rocker arm system, delivering precise valve timing at high engine speeds. With 73.5 Nm of torque available, opening up and effortlessly powering through the gears using easy shift leaves riders in no doubt of the thrilling performance packed into the lightweight unit below them.



## Perfectly suited for the ride

Supermoto





COMFORTABLE, VENTILATED AND WATERPROOF. THIS LIGHTWEIGHT, YET ROBUST OFFROAD COMBINATION PAYS SPECIAL ATTENTION TO DETAIL, ENSURING YOU ARE READY FOR WHATEVER CONDITIONS AWAIT YOU.

13



### Add a little extra to your ride

Accessories



AKRAPOVIČ "SLIP-ON LINE" 27005999000

14





HEATED GRIP KIT 21012964044







Stainless steel silencer with regulated

catalytic converter

16:42



Stainless steel silencer with regulated

catalytic converter

15:46

701 Enduro



701 Enduro LR

Stainless steel silencer with regulated

catalytic converter

15:46

Engine	701 Supermoto
--------	---------------

Single cylinder, 4-stroke Single cylinder, 4-stroke Single cylinder, 4-stroke Displacement 692.7 cc 692.7 cc 105/80 mm 105/80 mm 105/80 mm Bore/stroke 55 kW (74 hp) @ 8,000 rpm 55 kW (74 hp) @ 8,000 rpm 55 kW (74 hp) @ 8,000 rpm 73.5 Nm @ 6,500 rpm 73.5 Nm @ 6,500 rpm 73.5 Nm @ 6,500 rpm 12.7:1 Compression ratio 6 gears Pressure lubrication with 2 oil pumps Pressure lubrication with 2 oil pumps Pressure lubrication with 2 oil pumps Liquid cooling APTC slipper clutch, hydraulically operated APTC slipper clutch, hydraulically operated APTC slipper clutch, hydraulically operated Starter/battery Electric starter/12V 8.6Ah Electric starter/12V 8.6Ah Electric starter/12V 8.6Ah Keihin EFI (throttle body 50 mm) Keihin EFI (throttle body 50 mm) Keihin EFI (throttle body 50 mm) Keihin EMS with RBW, double ignition Keihin EMS with RBW, double ignition Keihin EMS with RBW, double ignition Engine Management/Ignition 4 V/OHC with intake cam levers and 4 V/OHC with intake cam levers and 4 V/OHC with intake cam levers and exhaust rocker arm exhaust rocker arm exhaust rocker arm

#### Chassis

Primary drive

Final drive

Engine type

Torque

Lubrication

Fuel system

Clutch

rame	Chromium-Molybdenum-Steel trellis frame,	Chromium-Molybdenum-Steel trellis frame,	Chromium-Molybdenum-Steel trellis frame,
	powder coated	powder coated	powder coated
Subframe	Self-supporting polyamide tank	Self-supporting polyamide tank	Self-supporting polyamide tank
Handlebar	Aluminium, tapered, Ø 28/22 mm	Aluminium, tapered, Ø 28/22 mm	Aluminium, tapered, Ø 28/22 mm
Front suspension	WP APEX-USD Ø 48 mm	WP XPLOR-USD Ø 48 mm	WP XPLOR-USD Ø 48 mm
Rear suspension	WP APEX-Monoshock with linkage	WP XPLOR-Monoshock with linkage	WP XPLOR-Monoshock with linkage
Suspension travel front/rear	215/240 mm	250/250 mm	250/250 mm
Front brakes	Brembo four-piston, radial caliper,	Brembo two-piston, floating caliper,	Brembo two-piston, floating caliper,
	brake disc Ø 320 mm	brake disc Ø 300 mm	brake disc Ø 300 mm
Rear brakes	Brembo single piston, floating caliper,	Brembo single piston, floating caliper,	Brembo single piston, floating caliper,
	brake disc Ø 240 mm	brake disc Ø 240 mm	brake disc Ø 240 mm
ABS	Bosch 9.1 MP (Cornering-ABS,	Bosch 9.1 MP (Cornering-ABS,	Bosch 9.1 MP (Cornering-ABS,
	disengageable)	disengageable)	disengageable)
Front/rear wheel	Spoked wheels with aluminium tubeless	Spoked wheels with aluminium rims,	Spoked wheels with aluminium rims,
	rims, 3.50 x 17"; 5.00 x 17"	1.85 x 21"; 2.50 x 18"	1.85 x 21"; 2.50 x 18"
Front/rear tyres	120/70 ZR17; 160/60 ZR17	90/90 R21; 140/80 R18	90/90 R21; 140/80 R18
Chain	X-Ring 5/8 x 1/4"	X-Ring 5/8 x 1/4"	X-Ring 5/8 x 1/4"
Steering head angle	63.6°	62.3°	62.3°
Triple clamp offset	35 mm (33 mm)	24 mm (22 mm)	24 mm (22 mm)
Wheel base	1,470 ± 15 mm	1,502 ± 15 mm	1,502 ± 15 mm
Ground clearance	238 mm	270 mm	270 mm
Seat height	890 mm	920 mm	925 mm
Tank capacity, approx.	13.0 litres/2.5 litres reserve	13.0 litres/2.5 litres reserve	25 litres/4.0 litres reserve
Weight, without fuel, approx.	147 kg	146 kg	155 kg

Standard equipment

All three models feature lean angle traction control, 2-ride modes, easy shift, cornering ABS.

### Own your own





Financing your own dream bike couldn't possibly be any easier. With Husqvarna Motorcycles' financial partner, riding off on a brand new motorcycle is simpler than you could've ever imagined. For each specific motorcycle, individually tailored financial solutions enable you to race off in no time. Speak to your nearest authorized Husqvarna Motorcycles dealer for

EXTENDED



Confidently take to the streets and experience more with Husqvarna Motorcycles' extended warranty. It's really easy; extend your standard manufacturer's warranty before it expires. You can renew it every year for up to 12 years or 80,000 km. Once covered, claims can easily be made via your authorized Husqvarna Motorcycles dealer to ensure the best possible service. Warranties on the bike can also be transferred upon change of ownership. So new or used, you can ride your Husqvarna motorcycle with peace of mind.



Husqvarna Motorcycles' lifetime\* Mobility Service keeps you safe at every turn with 12-month coverage free of charge. Lifetime Mobility Service is renewed at no additional cost for a maximum of 12 months with each service at your authorized Husqvarna Motorcycles dealer until the next service. Thanks to the Assistance Center, available 24 hours a day, 7 days a week, 365 days a year throughout Europe, any potential breakdowns are worry-free. See more details at http://husqvarna-motorcycles.com/mobilityservice.

Husqvarna Motorcycles Finance, Extended Warranty and Mobility Service might not be available for all markets. Please ask your local authorized Husqvarna Motorcycles dealer about the offers and conditions in your country.

\*The definition of lifetime for single-cylinder vehicles; max, 60,000 km or 8 years, whichever comes first; for two-cylinder vehicles: max. 80,000 km or 8 years, whichever comes first.

#### Legal disclaimer

The riders illustrated are professional motorcycle riders. The photos were taken on closed racing circuits or The riders illustrated are professional motorcycle riders. The photos were taken on closed racing circuits or closed roads. Husqvarna Motorcycles wishes to make all motorcyclests waver that they need to wear the prescribed protective gear and always ride in a responsible manner in accordance with the relevant and applicable provisions of the road traffic regulations. Only the homologated versions of the motorbikes promoted in this brochure are suitable for road use. Husqvarna Motocross models are not approved for use on public roads. For this reason, it is absolutely essential that use on public roads is avoided. The warnings and hazard notices in the owner's manual must be observed without fail when purchasing a motorcycle and using it for the first time (especially the prescribed speed limits). Some products in the Husqvarna Motorcycles accessories range are not approved for use on public roads in certain circumstances (varies from country to country). Please contact your Husqvarna Motorcycles dealer for further information. The illustrated vehicles may vary in selected details from the production models and some illustrations feature optional equipment existible at additional cost. details from the production models and some illustrations feature optional equipment available at additional cost. All information concerning the scope of supply, appearance, services, dimensions and weights is non-hinding and specified with the proviso that errors, for instance in printing, setting and/or typing, may occur; such information is subject to change without notice. Please note that model specifications may vary from country to country.







